

STR101P-HD-BA

Features:

- >1pc STR101P-HD-B1 + 1pc STR101P-A2
- >No power required, simplified project wiring
- >Compatible with HDCV1/ HDTV1/ AHD
- >Transmission distance (over Cat 5E/6):
 - HDCV1 720P/400m; 1080P/250m
 - HDTV1 720P&1080P/250m
 - AHD 720P/350m; 1080P/200m
- >Plug and play, real-time transmit CCTV HD video signal, video is high quality and stable
- >Anti-interference, super lighting protection, ESD
- >ABS outer shell, convenient to use in intensive project
- >1pc STR101P-HD-A2 push-terminal with pigtail, easier for installation
- >1pc STR101P-HD-B1 water-proof on the camera side

Specifications:



Transmission Signal: 1 channel

- Transmission Distance:
- > HDCVI 720P: 400m/1080p:250m
 - >HDTV1 720P & 1080P: 200m
 - >AHD 720P: 350m/1080P:200m

Installation Step:



Application Example:

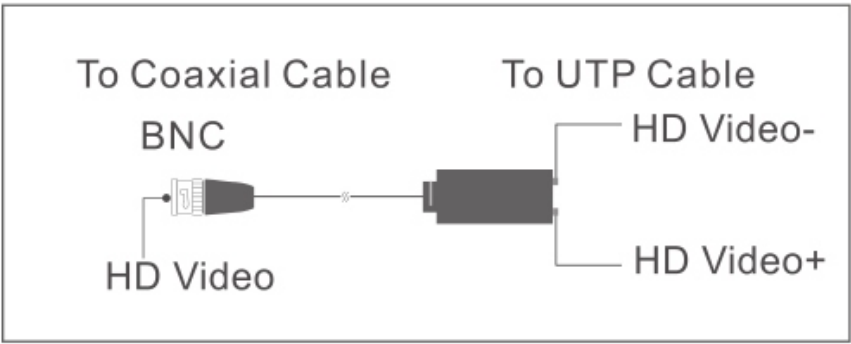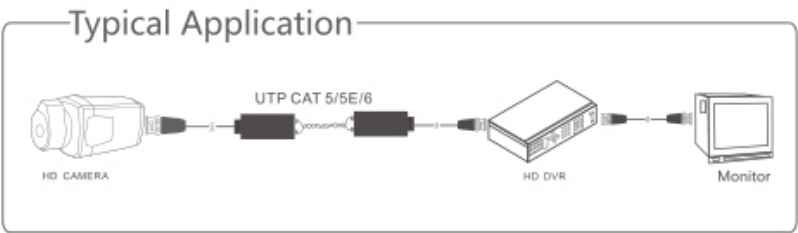

Video Balun
HD UTP

Specifications:

- Category Type: UTP CAT5/ 5E/ 6
Twisted-pair Video Connector: BNC-M
Compatible Format: HDCVI/HDTV1/AHD
Resolution: 720P/1080P
Ant-interference: >60db

- ESD:
- >1a contact discharge electricity level3
 - >1b air discharge electricity level3
 - >Per: IEC61000-4-2

Coaxial Cable Connector: 2KV(common-code)
Per:IEC1000-4-5

UTP Cable Connector: 2KV(different-code),
4KV(common-code),
Per:IEC1000-4-5

- BNC Male: 75 ohms
UTP Cable: 100 ohms
Shell: ABS
Color: Black
MTBF: >10000H
Operating Temperature: -10-55° C
Storage Temperature: -20-70° C
Humidity: 0-95%(non-condensing)