

STR101P-HD-S1



Features:

- >2pcs STR101P-HD-S1
- >No power required, simplified project wiring
- >Compatible with HDCVI/ HDTV1/ AHD
- >Transmission distance (over Cat 5E/6):
 - >HDCVI 720P/400m; 1080P/250m
 - >HDTV1 720P&1080P/250m
 - >AHD 720P/350m; 1080P/200m
- >Plug and play, real-time transmit CCTV HD video signal, video is high quality and stable
- >Anti-interference, super lightning protection, ESD
- >ABS outer shell, convenient to use in intensive project
- >Upside push-terminal, easier for installation
- >With connecting slot, many baluns can connect together

Advantages:

- >Many baluns can be connected
- >With upside push-terminal, easier for installation

Typical Application:

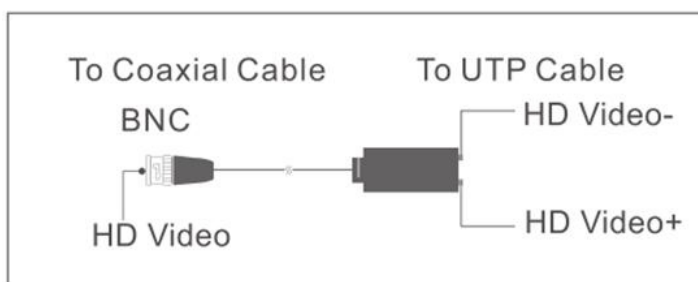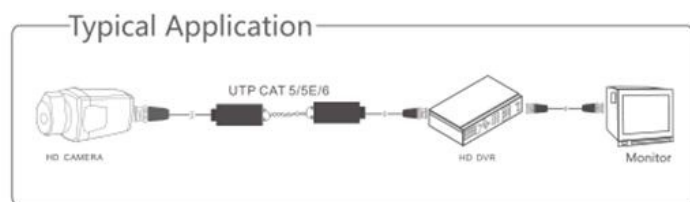

HD UTP Video Balun



Specifications:

Transmission Signal: 1 channel

Transmission Distance:

- > HDCVI 720P: 400m/1080p:250m
- >HDTV1 720P & 1080P: 200m
- >AHD 720P: 350m/1080P:200m

Category Type: UTP CAT5/ 5E/ 6

Twisted-pair Video Connector: BNC-M

Compatible Format: HDCVI/HDTV1/AHD

Resolution: 720P/1080P

Ant-interference: >60db

ESD:

- >1a contact discharge electricity level3
- >1b air discharge electricity level3
- >Per: IEC61000-4-2

Coaxial Cable Connector: 2KV(common-code) Per:IEC1000-4-5

UTP Cable Connector: 2KV(different-code),4KV(common-code), Per:IEC1000-4-5

BNC Male: 75 ohms

UTP Cable: 100 ohms

Shell: ABS

Color: Black

MTBF: >10000H

Operating Temperature: -10-55° C

Storage Temperature: -20-70° C

Humidity: 0-95%(non-condensing)